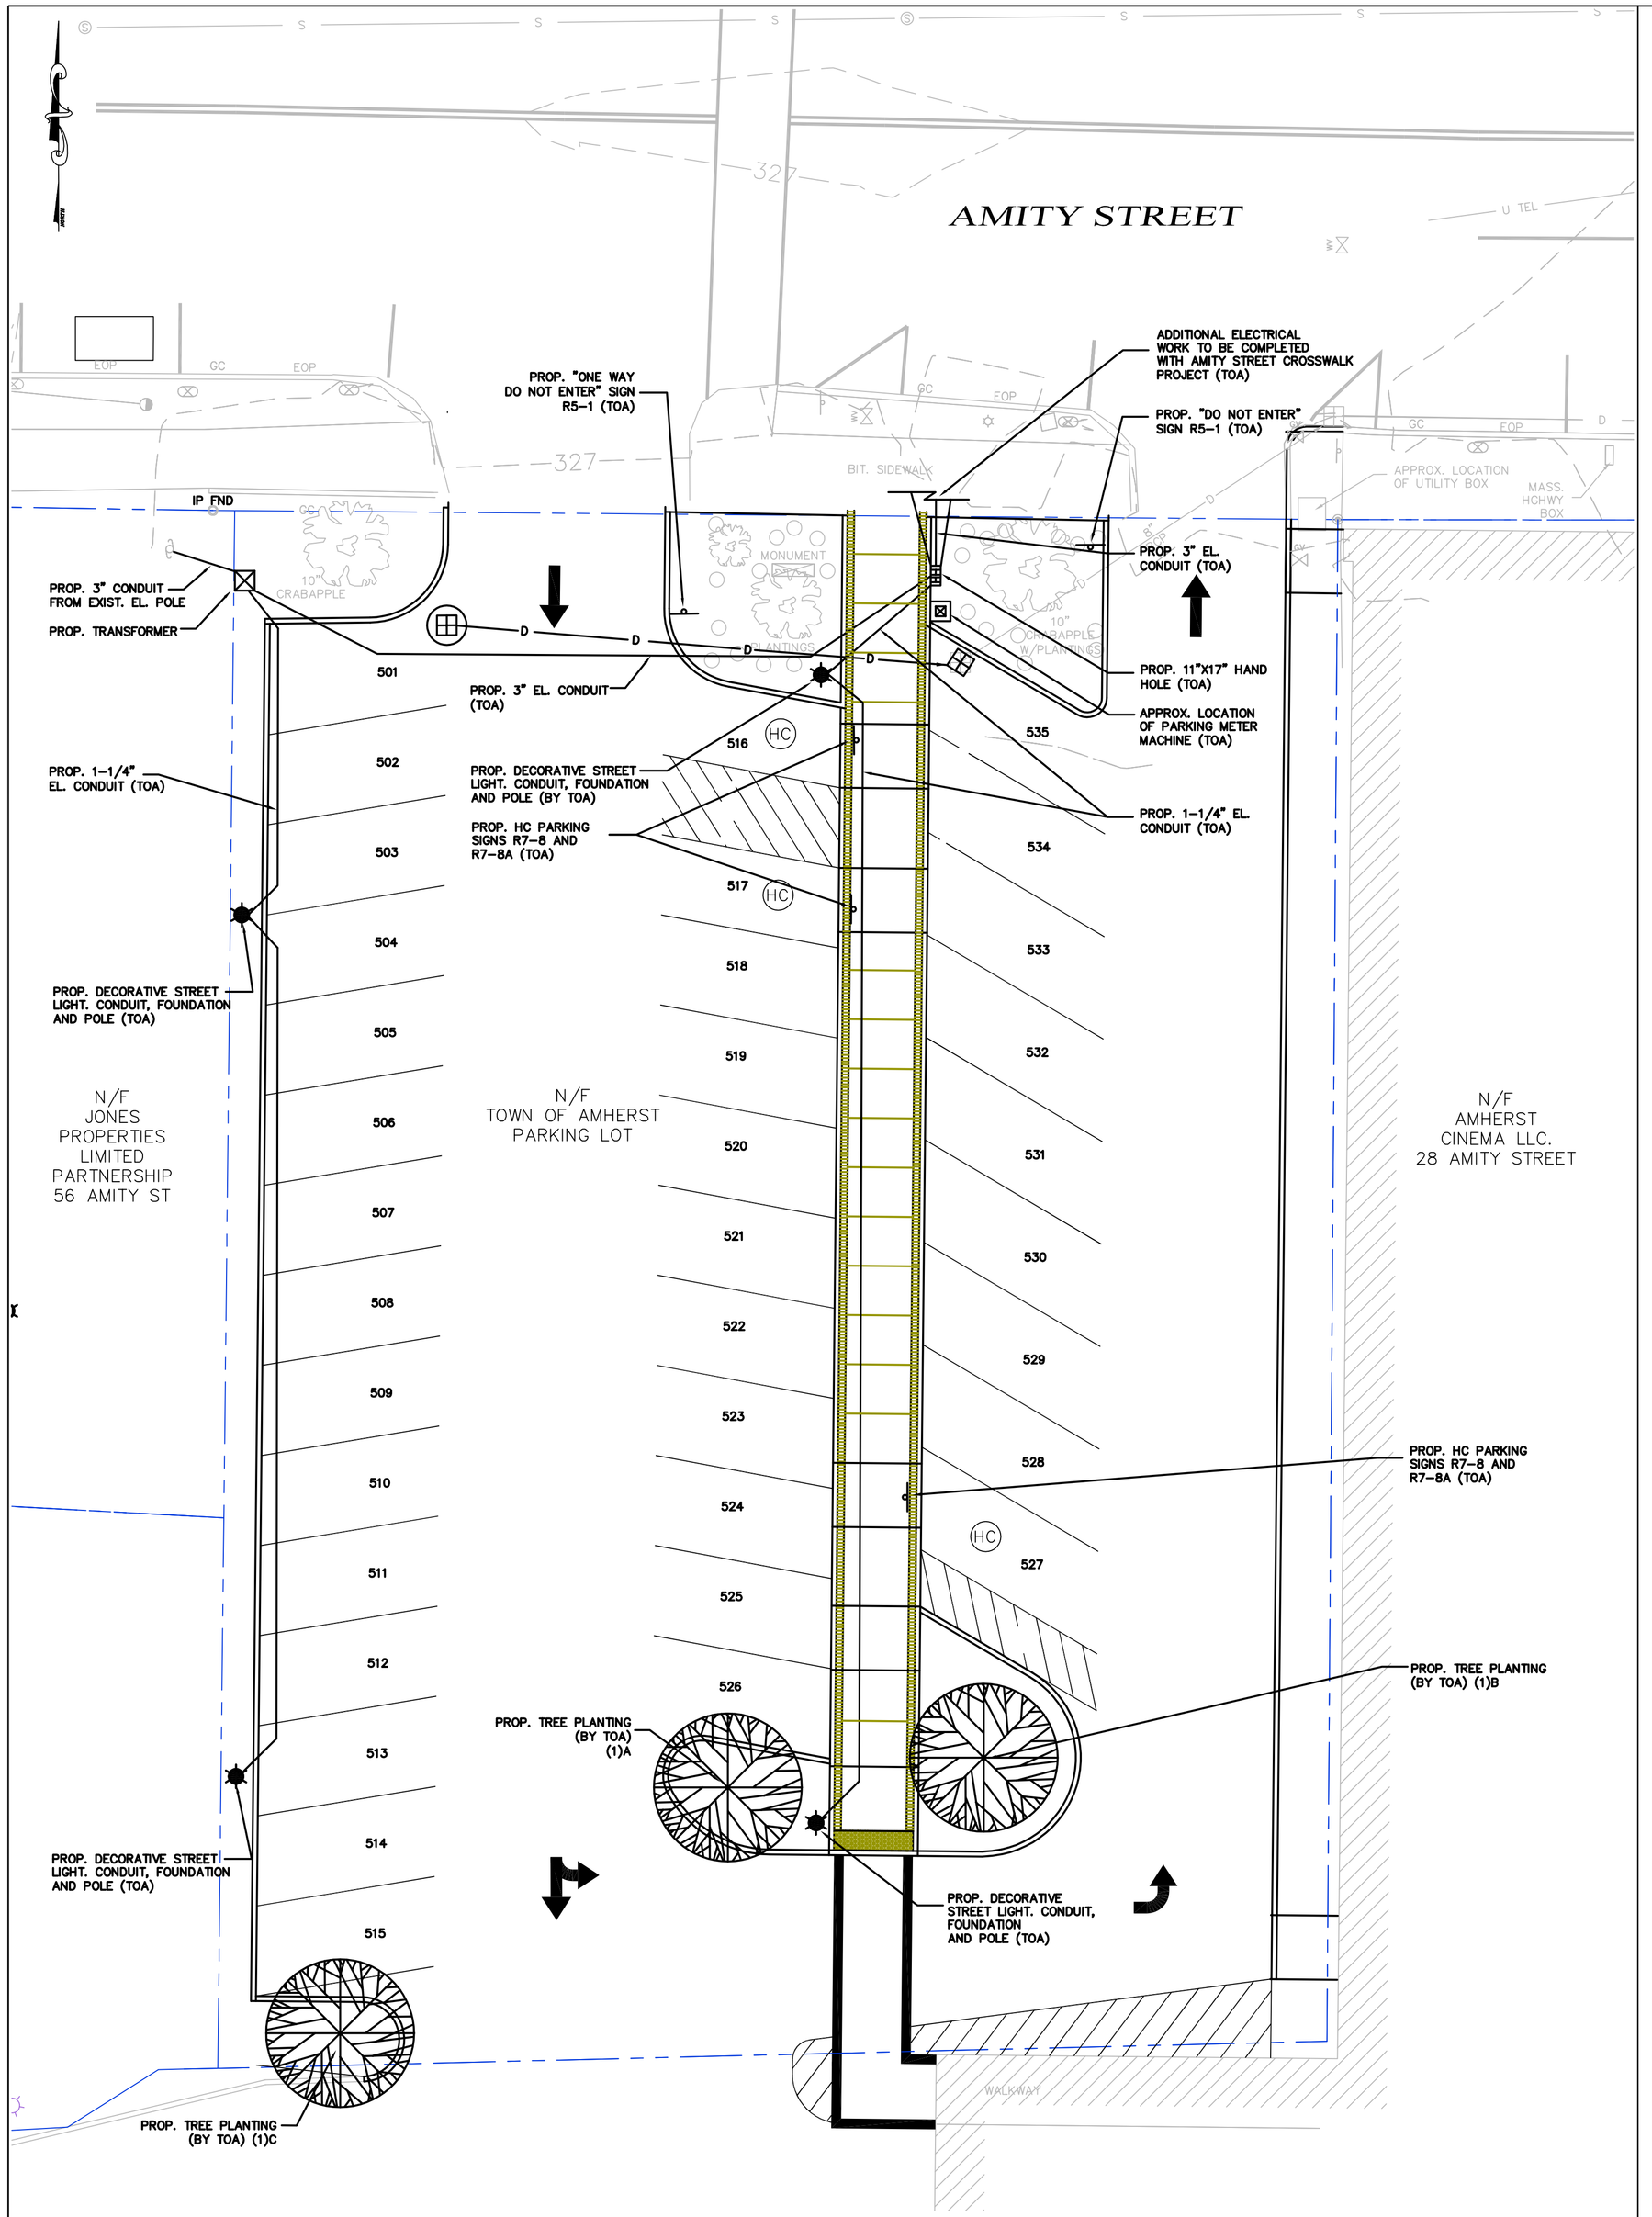

LIGHTING AND PLANTING

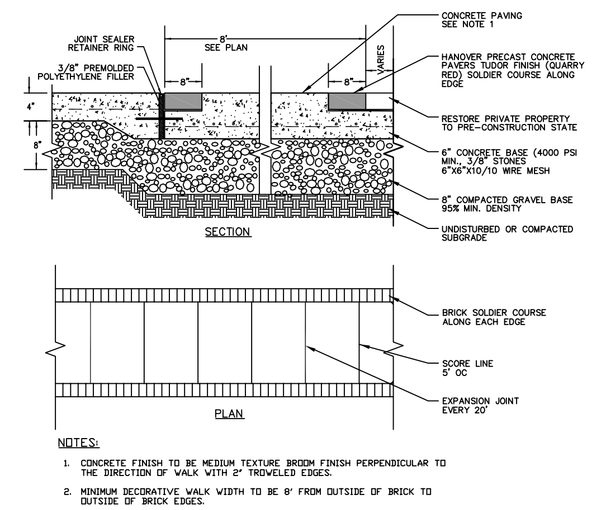

NOTES:

1. CONCRETE FINISH TO BE MEDIUM TEXTURE BROOM FINISH PERPENDICULAR TO THE DIRECTION OF WALK WITH 2" TROWELED EDGES.
2. MINIMUM DECORATIVE WALK WIDTH TO BE 8' FROM OUTSIDE OF BRICK TO OUTSIDE OF BRICK EDGES.

DECORATIVE CONCRETE WALK

N.T.S.

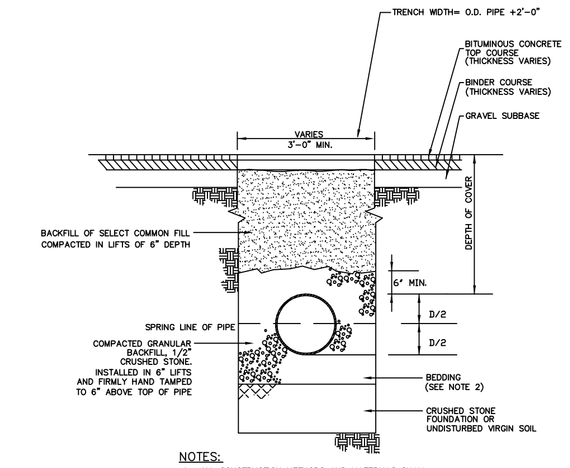

NOTES:

1. ALL CONSTRUCTION METHODS AND MATERIALS SHALL CONFORM TO THE CURRENT TOWN STANDARDS.
2. USE HAND OR MECHANICAL TAMPING TO COMPACT THE BEDDING AND BACKFILL MATERIAL.
3. GEOTEXTILE TO BE USED WHERE AND AS DIRECTED BY THE D.P.W.

TRENCH SECTION

N.T.S.

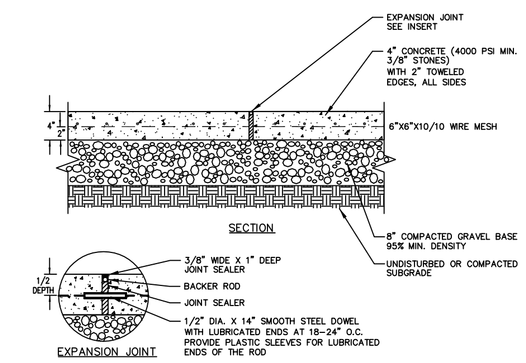

NOTES:

1. IN UNSUITABLE CONDITIONS ARE ENCOUNTERED DEPTH OF BASE MATERIAL SHALL BE INCREASED.
2. ALL SIDEWALKS SHALL BE CONSTRUCTED TO MEET CURRENT ADA HANDICAPPED REQUIREMENTS. MAINTAIN 2% MINIMUM CROSS SLOPE TOWARDS ROADWAY FOR ALL WALKWAY SURFACES.
3. SIDEWALKS SHALL HAVE A MIN. WIDTH OF 8'.
4. WALKWAY SCORING SHALL BE EVERY 5', EXPANSION JOINTS EVERY 20'.
5. CONCRETE FINISH TO BE MEDIUM TEXTURED BROOM FINISH PERPENDICULAR TO THE DIRECTION OF WALK WITH 2" TROWELED EDGES.

CONCRETE WALK/EXPANSION JOINT

N.T.S.

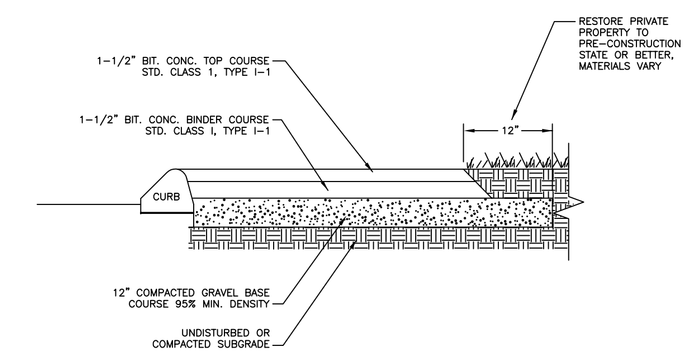

NOTES:

1. SIDEWALKS SHALL HAVE A MINIMUM WIDTH OF 5' OR AS NOTED ON PLAN.
2. IF UNSUITABLE CONDITIONS ARE ENCOUNTERED, DEPTH OF BASE MATERIAL SHALL BE INCREASED.
3. ALL SIDEWALKS SHALL BE CONSTRUCTED TO MEET CURRENT ADA HANDICAPPED REQUIREMENTS.
4. MAINTAIN 2% MINIMUM CROSS SLOPE TOWARDS ROADWAY OR PARKING LOT.

HMA SIDEWALK

N.T.S.

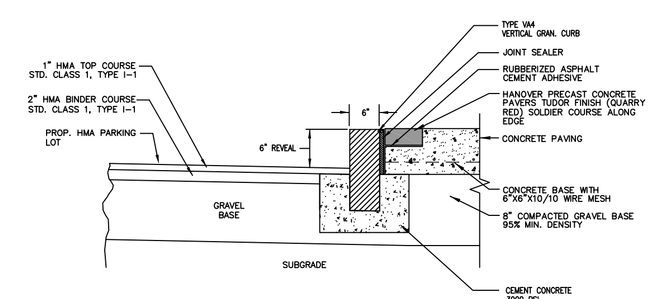

NOTES:

1. SEE PLAN FOR LOCATION OF 6" REVEAL, FLUSH GRAN. AND TRANSITION GRAN. CURB.

CONCRETE CURB INSTALLATION

N.T.S.

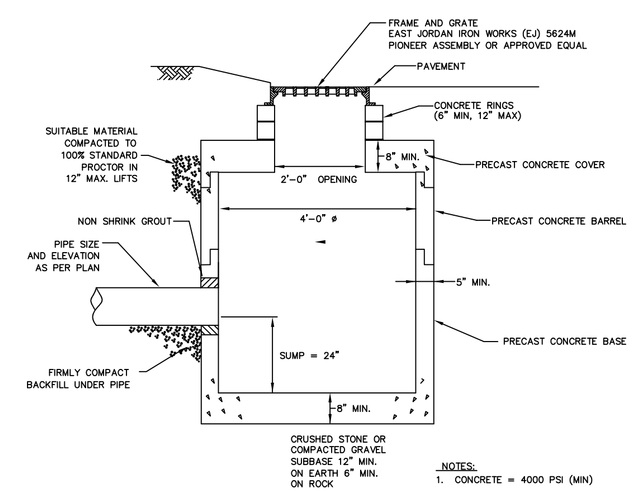

NOTES:

1. CONCRETE = 4000 PSI (MIN)

CATCH BASIN

N.T.S.

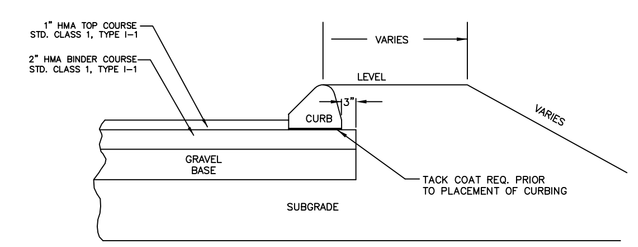

MHA CURB STANDARD, TYPE 2

N.T.S.

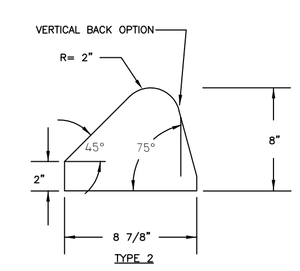

SITE DETAILS

SHEET: 4 OF 4

DRAWN BY: PGD CHCKD BY: GBM

SCALE: 1" = 10'

DATE: JANUARY 12, 2016

JOB NO.: TP09-09

REV.	DESCRIPTION	BY	DATE

CONSTRUCTION PLAN

AMITY STREET PARKING LOT IMPROVEMENTS

AMITY STREET

AMHERST, MASSACHUSETTS 01002

TOWN OF AMHERST
DEPARTMENT OF PUBLIC WORKS
ENGINEERING DIVISION
586 SOUTH PLEASANT STREET
AMHERST, MA. 01002
413-259-3029

AMHERST, MASSACHUSETTS FOUNDED 1759